


Aerial service cable

IEC 60502

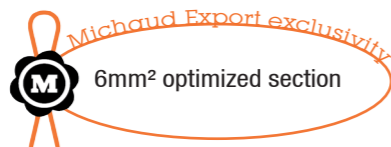

MIRELEC

Application

This single phase or three-phase aerial cable is used for the connection between the low voltage network and the home. It is perfectly suitable for electrification applications in rural and suburban areas thanks to its optimized 6mm² section. It is stretched to a maximum range of 40m.

Description

This single phase or three phase cable respectively consists of 2 or 4 twisted insulated conductors, phase(s) and neutral.

- Service voltage rate: 600V.
- Conductors core made of aluminium:
 - * Conductors section: 6mm²
 - * Diameter over core: 3.12mm
 - * Number of strands: 7
 - * Diameter of strands: 1.04mm
 - * Mechanical strength of strands: 18.5daN/mm²
 - * Minimum strain of strands: 1.2%
 - * Step factor: 10 - 16
 - * Step direction: right
- Conductors insulation made of polyethylene:
 - * Nominal insulation thickness: 1.2mm
 - * Minimum insulation thickness: 0.98mm
 - * Diameter over insulation: 5.52mm
- Cable characteristics:
 - * Phase identification: marking
 - * Twist step factor: 25 - 60
 - * Twist step direction: right
 - * Twist weight: 75kg / km
 - * Dielectric test / water: 2.5kVac / 1 min
 - * Linear strength to 20°C: 4.5Ω/km
 - * Maximum intensity in permanent capacity in the open air: 30A
 - * Maximum temperature in service: 90°C

- Cable meeting the acceptance criteria of the IEC 60502 standard.

References

Code	Designation	Packaging	Weight (kg)	Sales unit
U 300	AERIAL SERVICE CABLE 2x6mm ²	200m ring	15	1
U 304	AERIAL SERVICE CABLE 4x6mm ²	200m ring	30	1



Other cable sections available.



Please enquire.

Accessories dedicated to the 6mm² cable

EN 50483 CE NF



L 227

This insulation piercing connector is used to perform a tap connection from a network from 16 up to 95mm² with the 6mm² aerial service cable.

References

Code	Designation	Weight (kg)	Sales unit
L 227	CONNECTOR CES/CT 95	0.060	20



L 306

L 304

This accessory is used for supporting service network of type 2x6 up to 4x25mm².



U 500

This anchoring clamp is used to fix 2x6mm² service cable between the pole and the home. It can be associated with the PF25 fixing clamp L304 for implementation on a wall or a pole, thanks to a screw M10 L306 or strap.

K 265



Code	Designation	Weight (kg)	Sales unit
U 500	ANCHORING CLAMP 2x6mm ² - PA6	0.100	50
L 304	FIXING CLAMP - PF25	0.010	100
L 306	SCREW M10	0.048	30
K 265	BELT SUSPENSION WITH RING	0.020	25



SEE SHEET

Strap and antislipping buckles



This tool is perfectly adapted to strip 6mm² section cables to facilitate wiring to equipment.

Code	Designation	Weight (kg)	Unit sale
F 493	STRIPPING TOOL 6mm ²	0.150	1