

Preinsulated sleeve for
aerial sub-surface connection E140




Application

This preinsulated sleeve is designed for the connection of stranded core aerial service cables (aluminium or copper) to aluminium solid core sub-surface service cables. It is also used to connect aluminium solid core service cables to one another. Cable sections up to 25mm² can be connected on the stranded core side and up to 35mm² on the solid core side.

Description

- The sleeve can be used in mechanical traction.
- The sleeve has got an excellent dielectric strength, greater than 6kV.
- The materials are protected against UV.

This preinsulated sleeve meets the requirements of the **NF C 33-021** and **EN 50-483** standards.

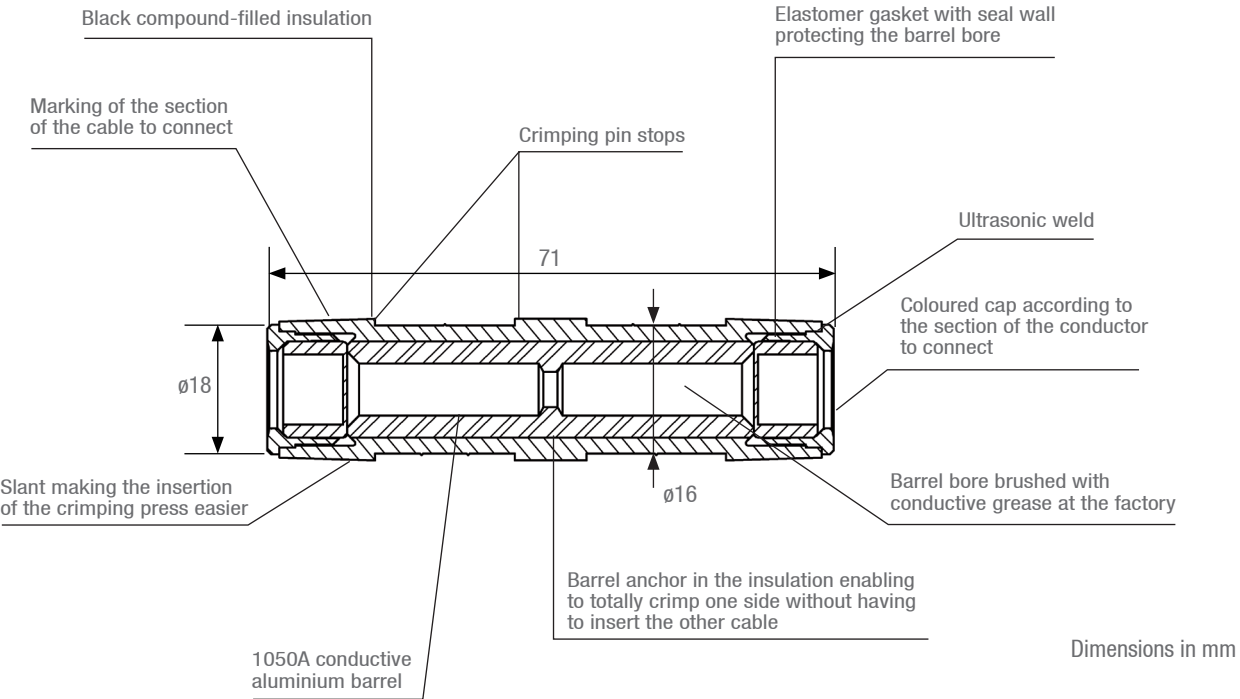

Installation video available on www.michaud-export.com

Code	Designation	Aerial cable insulated Al-Cu section (mm²)	Aerial colour	Subsurface cable insulated Al (mm²)	Subsurface colour		Weight (kg)	Sales unit
					Cap	Gasket		
AERIAL SUB-SURFACE SLEEVES (CONNECTION OF A STRANDED CORE CABLE WITH A SOLID CORE CABLE)								
K068	PREINSULATED SLEEVE (E140) MJPBAS 10-25M	10	GREEN	25 M	GREY	ORANGE	0.030	10
K069	PREINSULATED SLEEVE (E140) MJPBAS 10-35M	10	GREEN	35 M	GREY	RED	0.030	10
K064	PREINSULATED SLEEVE (E140) MJPBAS 16-4M	16	BLUE	4 M	GREY	BLACK	0.030	10
K065	PREINSULATED SLEEVE (E140) MJPBAS 16-6M	16	BLUE	6 M	GREY	BLACK	0.030	10
K070	PREINSULATED SLEEVE (E140) MJPBAS 16-16M	16	BLUE	16 M	GREY	BLUE	0.030	10
K078	PREINSULATED SLEEVE (E140) MJPBAS 16-25M	16	BLUE	25 M	GREY	ORANGE	0.030	10
K079	PREINSULATED SLEEVE (E140) MJPBAS 16-35M	16	BLUE	35 M	GREY	RED	0.030	10
K072	PREINSULATED SLEEVE (E140) MJPBAS 25-16M	25	ORANGE	16 M	GREY	BLUE	0.030	10
K074	PREINSULATED SLEEVE (E140) MJPBAS 25-25M	25	ORANGE	25 M	GREY	ORANGE	0.030	10
K076	PREINSULATED SLEEVE (E140) MJPBAS 25-35M	25	ORANGE	35 M	GREY	RED	0.030	10

M means that the core of the conductor is solid.

Code	Designation	Leading-in cable section	Leading-out cable section	Subsurface colour		Weight (kg)	Sales unit
		insulated Al (mm²)	insulated Al (mm²)	Cap	Gasket		
SUB-SURFACE SLEEVES (CONNECTION OF TWO SOLID CORE CABLES TO ONE ANOTHER)							
K085	PREINSULATED SLEEVE (E140) MJPBS 16M-35M	16 M	35 M	GREY	BLUE/ RED	0.030	10
K073	PREINSULATED SLEEVE (E140) MJPBS 25M-25M	25 M	25 M	GREY	ORANGE/ ORANGE	0.030	10
K086	PREINSULATED SLEEVE (E140) MJPBS 25M-35M	25 M	35 M	GREY	ORANGE/ RED	0.030	10
K075	PREINSULATED SLEEVE (E140) MJPBS 35M-35M	35 M	35 M	GREY	RED/ RED	0.030	10

M means that the core of the conductor is solid.

Variant:

Sleeves for neutral screen underground service cables (HM-27/03/139). They have a purple coloured cap on the copper side (21mm²).

Code	Designation	Poids (kg)	Unité vente
AERIAL/SUB-SURFACE SLEEVES			
K081	PREINSULATED SLEEVE (E140) MJPBAS 25-21Cu	0.030	10
SUB-SURFACE SLEEVES			
K083	PREINSULATED SLEEVE (E140) MJPBS 25M-21Cu	0.030	10

M means that the core of the conductor is solid.



SEE SHEET
INSTALLATION / Hydraulic crimping tool