

REMIC bare cabinet



600 cabinet:
12 connection
terminals


- + 180° opening door
- + Modular



Application

DIN cabinets exist in 3 widths and are designed to receive a 300, 450 or 600mm REMIC set of bars support. They use "common" equipment (direct connection network, service) and RRCP cutting / protection network connection modules. They are also designed for possible re-supply of the set of bars support without additional re-supply doors.

Dimensions

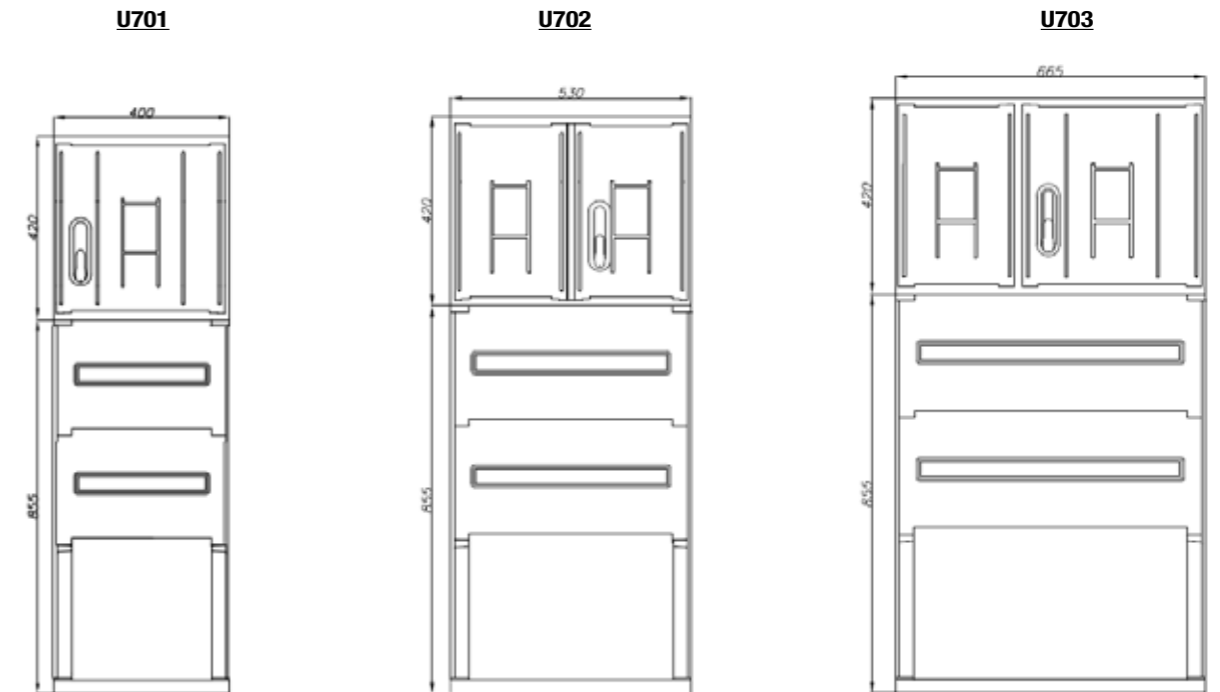


Dimensions in mm

Code	Designation	Weight (kg)	Sales unit
U701	DIN CABINET FOR 6 STEPS REMIC GRID	15.000	1
U702	DIN CABINET FOR 9 STEPS REMIC GRID	18.000	1
U703	DIN CABINET FOR 12 STEPS REMIC GRID	20.000	1

All of the references are available in remote meter reading system or with flash marking; please contact us.

Accessories

 **SEE SHEET**
LV modular connection cabinet / REMIC equipped cabinet

Description

- These cabinets are made for outdoor use. They are IP44 and IK10.
- These DIN cabinets have a V0 flammability category.
- They are equipped with inserts for receiving the REMIC sets of bars supports.
- They are available in 3 versions, depending on the type of bars supports needed.
- Cabinet's doors can be open at 180° which facilitate implementation, operation and maintenance.
- The monobloc front face is completely removable to facilitate connection inside the cabinet.
- The plinth is used to adapt the above ground height of the cabinets.
- A re-supply trapdoor is included in the cabinet.
- The cabinets are delivered with their fixing foundations.
- These cabinets meet the criteria of **EN 62208:2011**.