

Mechanical fixing

Anchoring



Utilisation

The anchoring assembly is used for single or double dead-ending of A.B.C (Aerial Bundled Conductors) with insulated neutral messenger. Two different sections of neutral messenger are available: 54.6mm² and 70mm².

Code	Designation	Weight (kg)	Sales unit
U501	ANCHORING CLAMP 54.6mm² - PA 54.6	0.410	30
U501-70	ANCHORING CLAMP 70mm² - PA 70	0.530	25
U502	ANCHORING BRACKET 54.6mm² - CA 54.6	0.235	50
U502-70	ANCHORING BRACKET 70mm² - CA 70	0.300	60

Suspension



Utilisation

The suspension assembly is used to suspend a twisted isolated network. It is available in two versions: for a 54.6 mm² section neutral or for a 70mm² section neutral. The bracket is available for 54.6 mm² carrier neutral suspension clamps.

Code	Designation	Weight (kg)	Sales unit
U503	SUSPENSION ASSEMBLY 54.6mm² - ES 54.6	0.510	20
U503-70	SUSPENSION ASSEMBLY 70mm² - ES 70	0.650	20
U504	SUSPENSION ASSEMBLY 54.6 mm² - CS 54,6	0.490	30

Service anchoring




Utilisation

This accessory is used for anchoring service cable.

Code	Designation	Weight (kg)	Sales unit
U500_4x25	SERVICE ANCHORING CLAMP - PA 25	0.105	100
F027	ANGULAR CLAMP RA25	0.080	100
L304	FIXING CLAMP - PF25	0.010	100
F305	MULTIPLE ANCHORING BRACKET - CAM 25	0.220	100

Nota : For pole hardware (BQC) supply, **please enquire**.

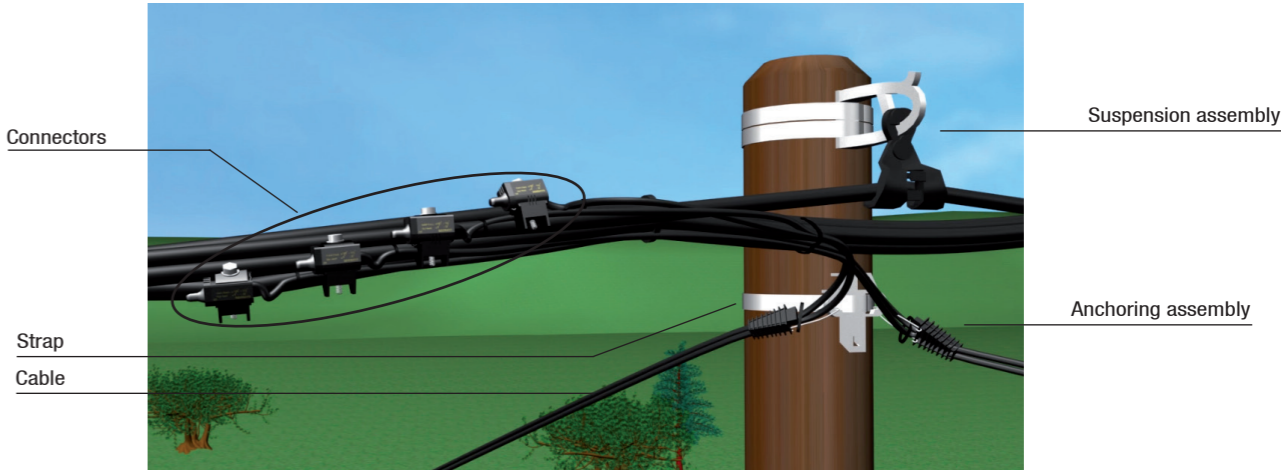

SEE SHEET  
ACCESS TO ENERGY / Distribution / Stainless steel strap