





Set of bars 300  
Q 600

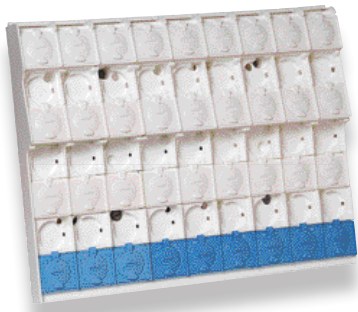

Set of bars 450  
Q 601

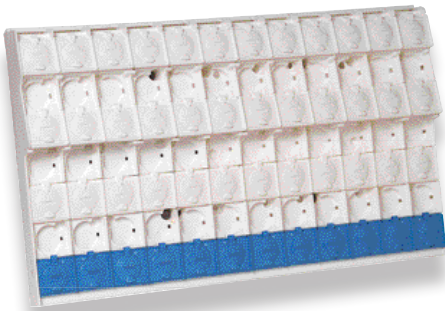

Set of bars 600  
Q 602


Application

The sets of bars supports 300, 450 and 600 respectively offer 6, 9 and 12 connection terminals for each pole.

Description

- The sets of bars supports 300, 450 and 600 are respectively made of 6, 9 and 12 steps of 50mm.
- The set of bars support is fixed to the bottom of all REMBT cabinets on standardised inserts.
- The inclination of the phase bars facilitates connection.
- The poles are identified (N, L1, L2, L3).
- The modules are fixed using standardised M12 threads.
- The product is IP2X before and after installation. The unused connection terminals are covered using a captive cap.
- A 400A re-supply device can be connected directly to the connection terminals. IP2X is maintained thanks to the 35mm diameter of the terminals.

These sets of bars supports meet the criteria of the **HN 63-S-65** standard.

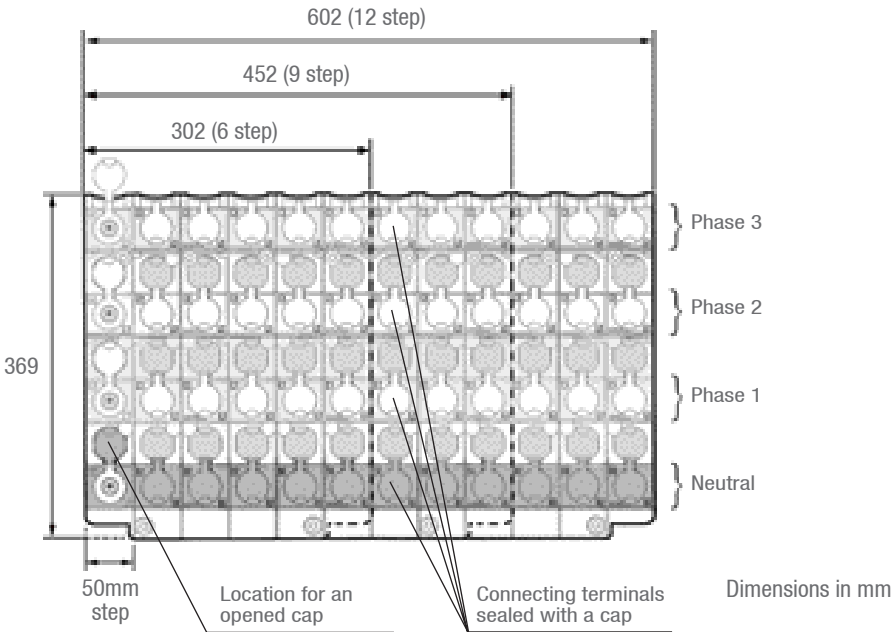

Code	Designation	Weight (kg)	Sales unit
Q600	REMIC SET OF BARS SUPPORT 300	2.630	1
Q601	REMIC SET OF BARS SUPPORT 450	3.760	1
Q602	REMIC SET OF BARS SUPPORT 600	4.870	1

Accessories

Code	Designation	Weight (kg)	Sales unit
ADAPTORS FOR S15-S20 CABINETS			
Q618	REMIC STANDARD S20 CABINET FRAME	1.030	1
Q619	REMIC STANDARD S15 CABINET FRAME	1.550	1

